




Transducer TC2122

Dual-Frequency Survey Echosounder Transducer

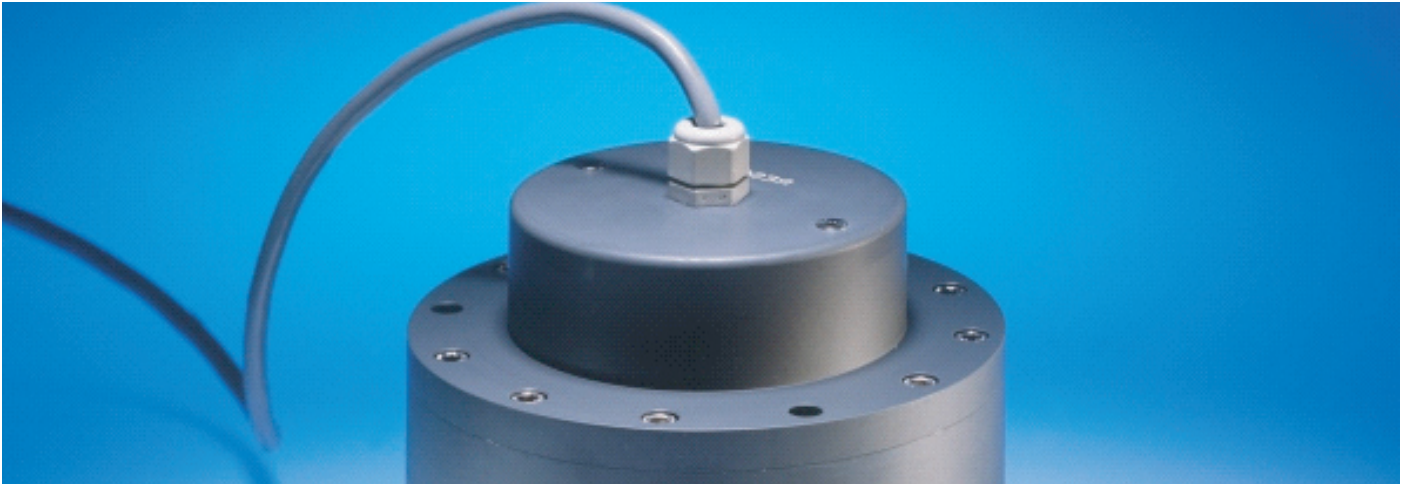

TC2122

- Narrow beams
- High acoustical performance
- Compact design
- Compatible with ATLAS SW60/28/6029 housing.
- Electrical compatible with most 33kHz and 200kHz echosounders.

Model TC2122 is a 33kHz and 200kHz dual frequency transducer ideal for navigation and hydrographic echosounder systems. The transducer has excellent piezoceramic elements which will ensure the highest reliability and quality in echosounding. The transducer will fit ATLAS SW 60/28/6029 housing and RESON steel housings.


TECHNICAL SPECIFICATIONS

Resonant Frequency:	33kHz $\pm$ 2kHz 200kHz $\pm$ 5kHz
Transmitting sensitivity:	168dB $\pm$ 3dB at 33KHz 174dB $\pm$ 3dB at 200KHz (re 1 μ Pa/V at 1m)
Receiving Sensitivity:	-177dB $\pm$ 3dB at 33KHz -187dB $\pm$ 3dB at 200KHz (re 1 μ Pa/V)
Impedance:	80ohm $\pm$ 24ohm at 33kHz and 200kHz
Beam width:	22 $^{\circ}$ $\pm$ 2 $^{\circ}$ at 33KHz 9,5 $^{\circ}$ $\pm$ 1 $^{\circ}$ at 200kHz
Beam shape:	Conical
Max input power:	1000W at 33kHz 450W at 200kHz (at 1% duty cycle)
Operating depth:	30m
Survival depth:	50m
Operating temperature range:	-2 $^{\circ}$ C to +35 $^{\circ}$ C
Storage temperature range:	-30 $^{\circ}$ C to +50 $^{\circ}$ C
Weight in air, with cable:	5kg
Housing:	PVC
Cable (length and type):	33m FALMAT Type FM088095-7, 4x1 (2 x twisted pair) PUR Jacket, WATER BLOCK, Kevlar Braid 800lbs breaking strength (O.D. 11mm) - pigtail




Typical graphs 33kHz


Horizontal Directivity Pattern

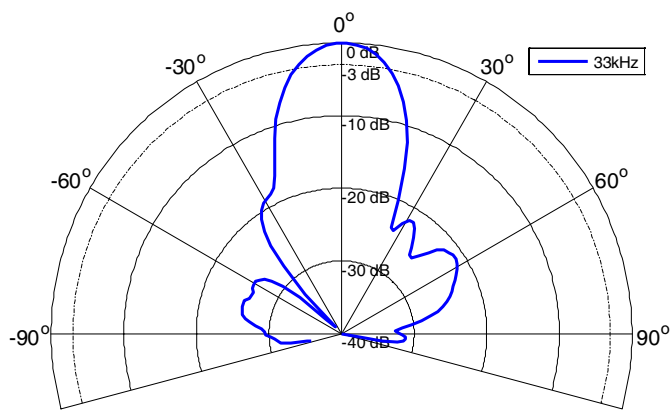


Receiving Sensitivity [dB re 1V/μPa @ 1m]

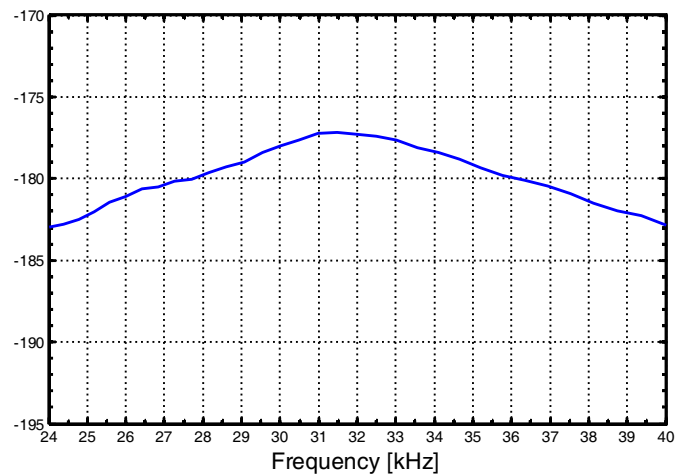

Transmitting Sensitivity [dB re 1μPa/V @ 1m]

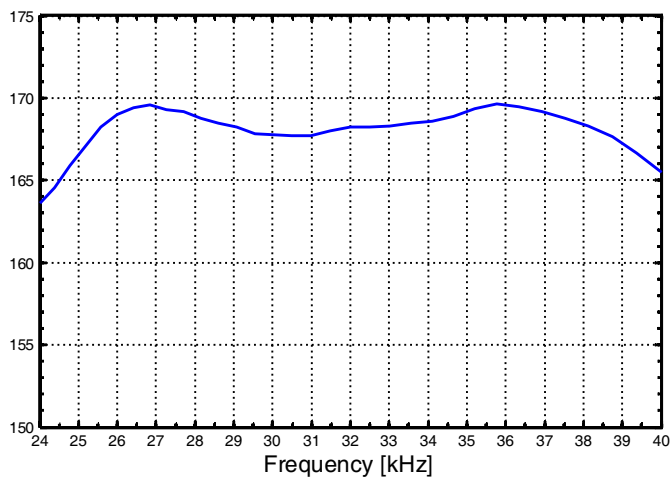


Impedance

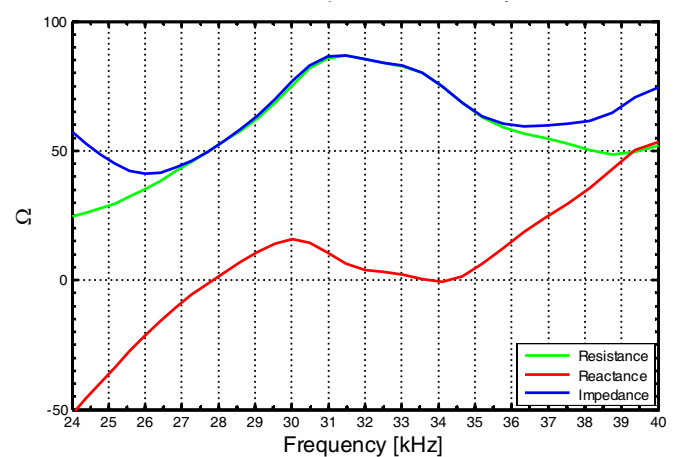


Typical graphs 200kHz


Horizontal Directivity Pattern

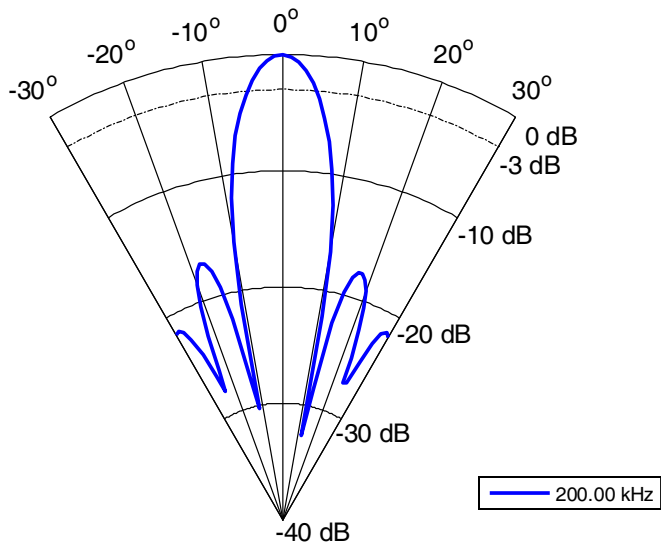


Receiving Sensitivity [dB re 1V/μPa @ 1m]

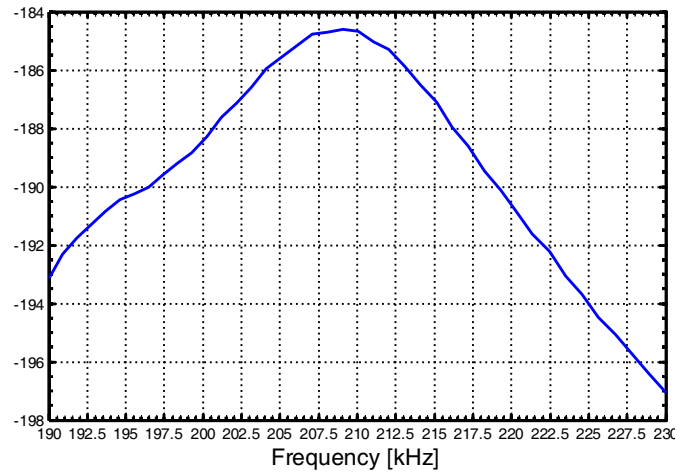

Transmitting Sensitivity [dB re 1μPa/V @ 1m]

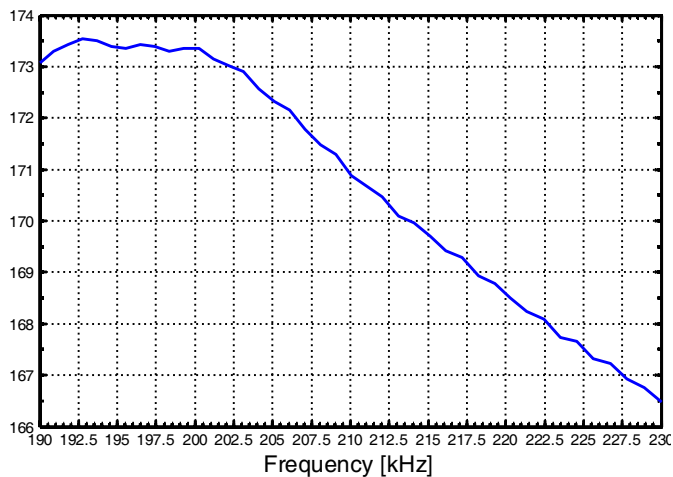

Impedance

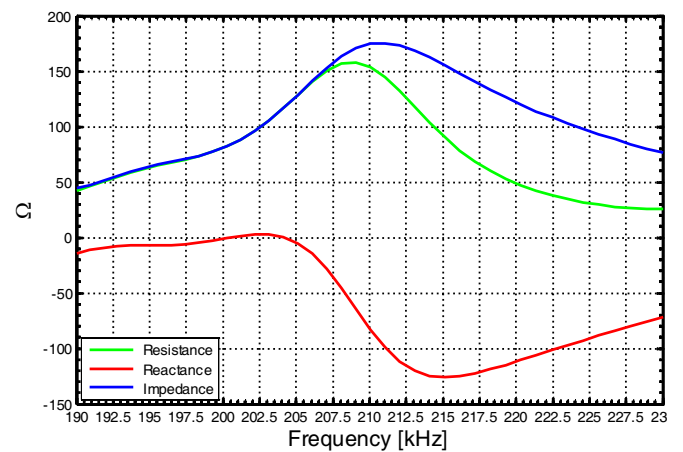




Transducer TC2122

Dual-Frequency Survey Echosounder Transducer

Outline Dimensions

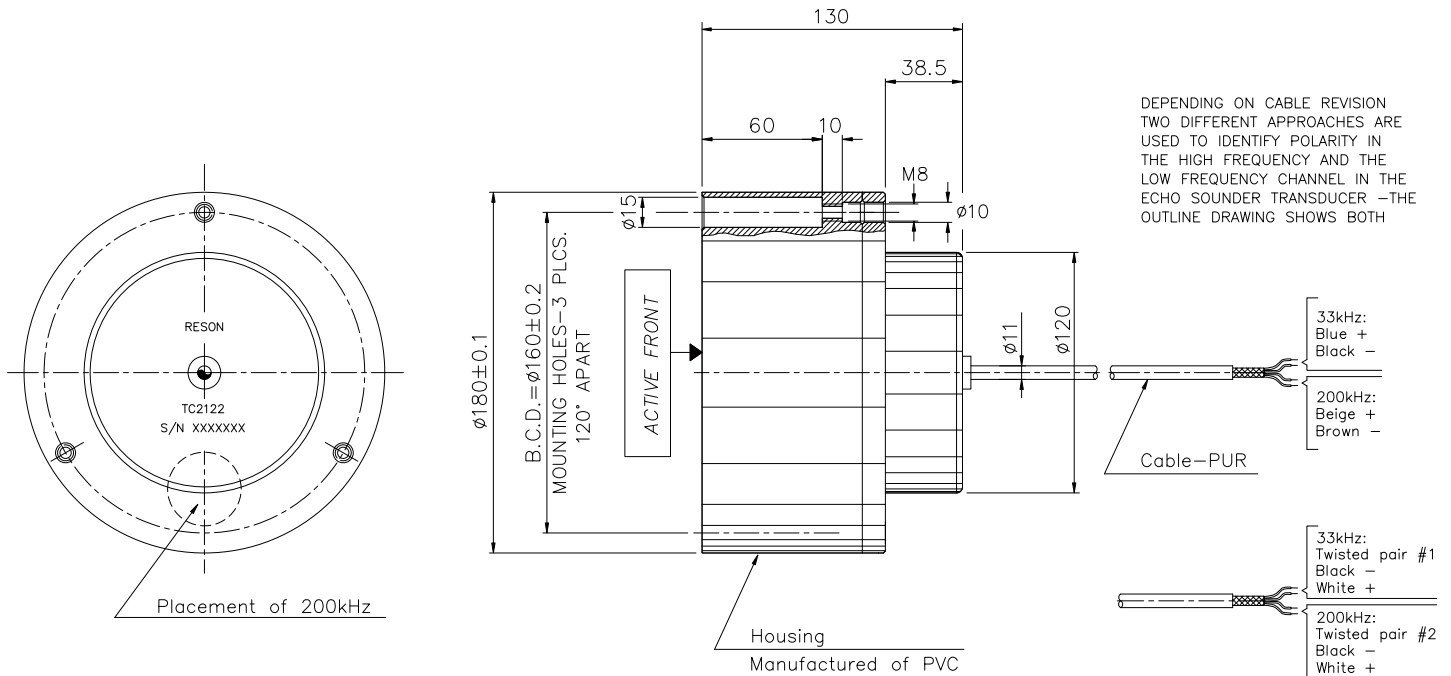

RESON reserves the right to change specifications without notice. © 2006 RESON A/S
For Acoustical Measurement Accuracy please refer to www.reson.com or contact sales.

RESON A/S
Denmark
Tel: +45 4738 0022
E-mail: reson@reson.com

RESON Inc.
USA
Tel: +1 805 964-6260
E-mail: sales@reson.com

RESON Offshore Ltd.
United Kingdom
Tel: +44 1224 709 900
E-mail: sales@reson.co.uk

RESON GmbH
Germany
Tel: +49 431 720 7180
E-mail: reson@reson-gmbh.de

RESONB.V.
The Netherlands
Tel: +31 (0) 10 245 1500
E-mail: info@reson.nl

RESON (Pte.) Ltd.
Singapore
Tel: +65 6725 9851
E-mail: sales@reson.com