



Transducer TC2178

Dual Frequency Transducer



TC2178

- Hydrodynamic shape
- Narrow beams
- High acoustical performance
- Compact design
- Electrical compatible with most 33 kHz and 200 kHz echosounders.
- Can be mounted directly on outboard rig.

Model TC2178 is an optimized and hydrodynamic 33 kHz and 200 kHz dual frequency transducer ideal for navigation and hydrographic echo sounder systems.

The transducer has excellent piezoceramic elements which will ensure the highest reliability and quality in echosounding.

TECHNICAL SPECIFICATIONS

Resonant Frequency:	33 kHz $\pm$ 2kHz 200kHz $\pm$ 5kHz
Transmitting sensitivity:	168dB $\pm$ 3dB at 33kHz (re 1 μ Pa/V at 1m) 174dB $\pm$ 3dB at 200kHz (re 1 μ Pa/V at 1m)
Receiving Sensitivity:	-177dB $\pm$ 3dB at 33kHz (re 1V/ μ Pa) -187dB $\pm$ 3dB at 200kHz (re 1V/ μ Pa)
Impedance:	80 ohm $\pm$ 24ohm at 33kHz and 200kHz
Beam width:	22° $\pm$ 2° at 33kHz 9.5° $\pm$ 1° at 200kHz
Beam shape:	Conical
Max input power:	1000 W at 33kHz (at 1% duty cycle) 450 W at 200kHz (at 1% duty cycle)
Operating depth:	30 m
Survival depth:	50 m
Operating temperature range:	-2°C to +35°C
Storage temperature range:	-30°C to +50°C
Weight in air, with cable:	9.7kg
Housing:	PVC
Cable (length and type):	18m FALMAT Type FM088095-7, 4x1 (2 x twisted pair) PUR Jacket, WATER BLOCK, Kevlar Braid 800lbs breaking strength (O.D. 11mm) - pigtail






Transducer TC2178


Dual Frequency Transducer

Typical graphs 33kHz


Vertical directivity pattern

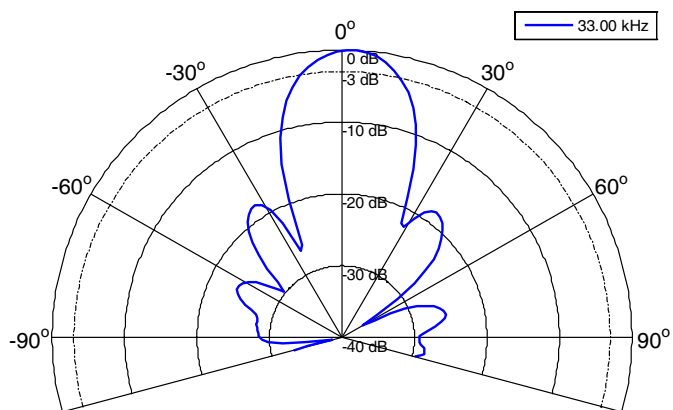


Receiving Sensivity [dB re 1V/ μ Pa @ 1m]

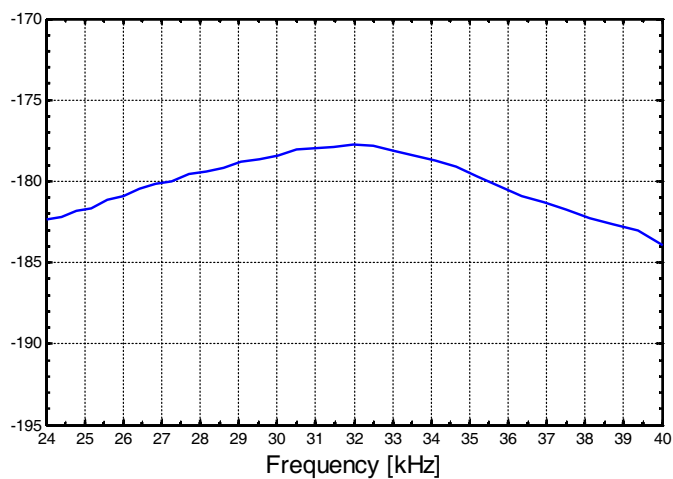

Transmitting sensitivity [dB re 1 μ Pa/V @ 1m]

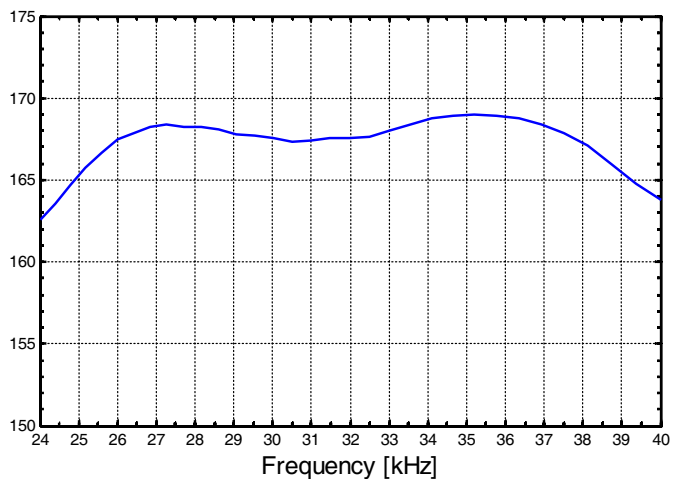


Impedance

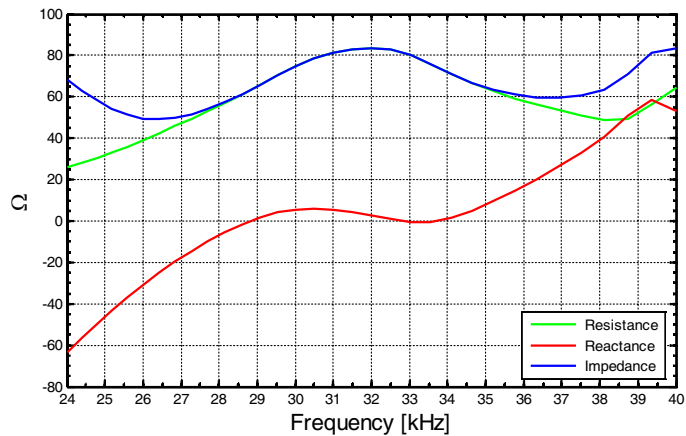


Typical graphs 200kHz


Vertical directivity pattern

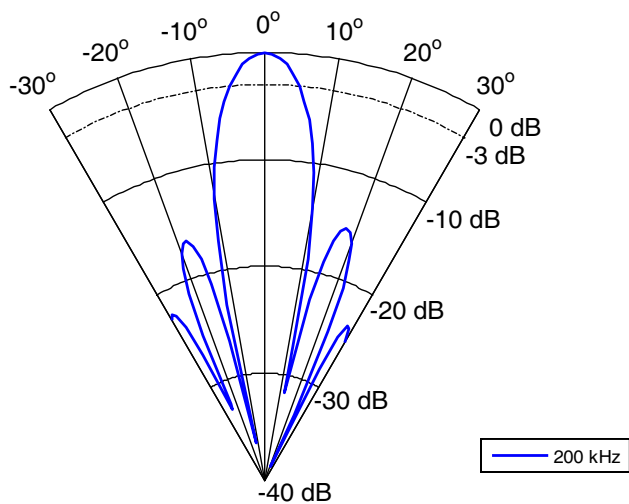


Receiving Sensitivity [dB re 1V/μPa @ 1m]

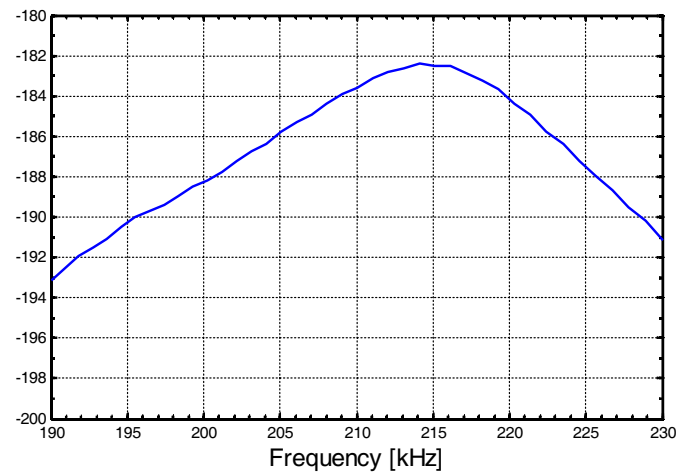

Transmitting sensitivity [dB re 1μPa/V @ 1m]

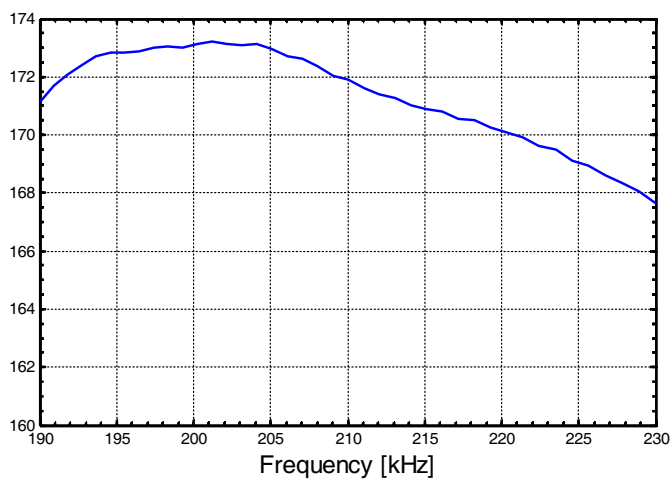

Impedance

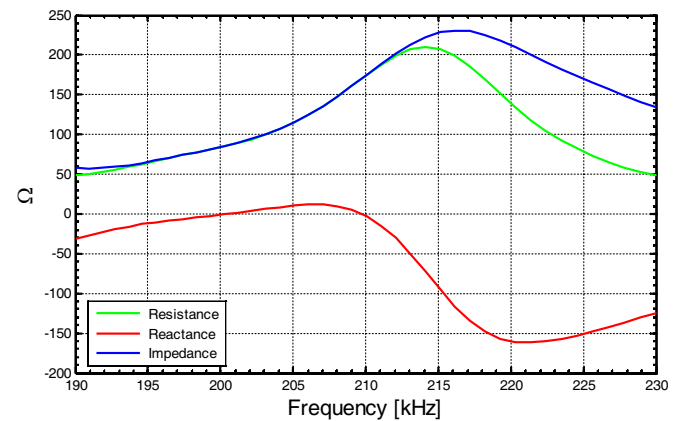




Transducer TC2178

Dual Frequency Transducer

Outline Dimensions

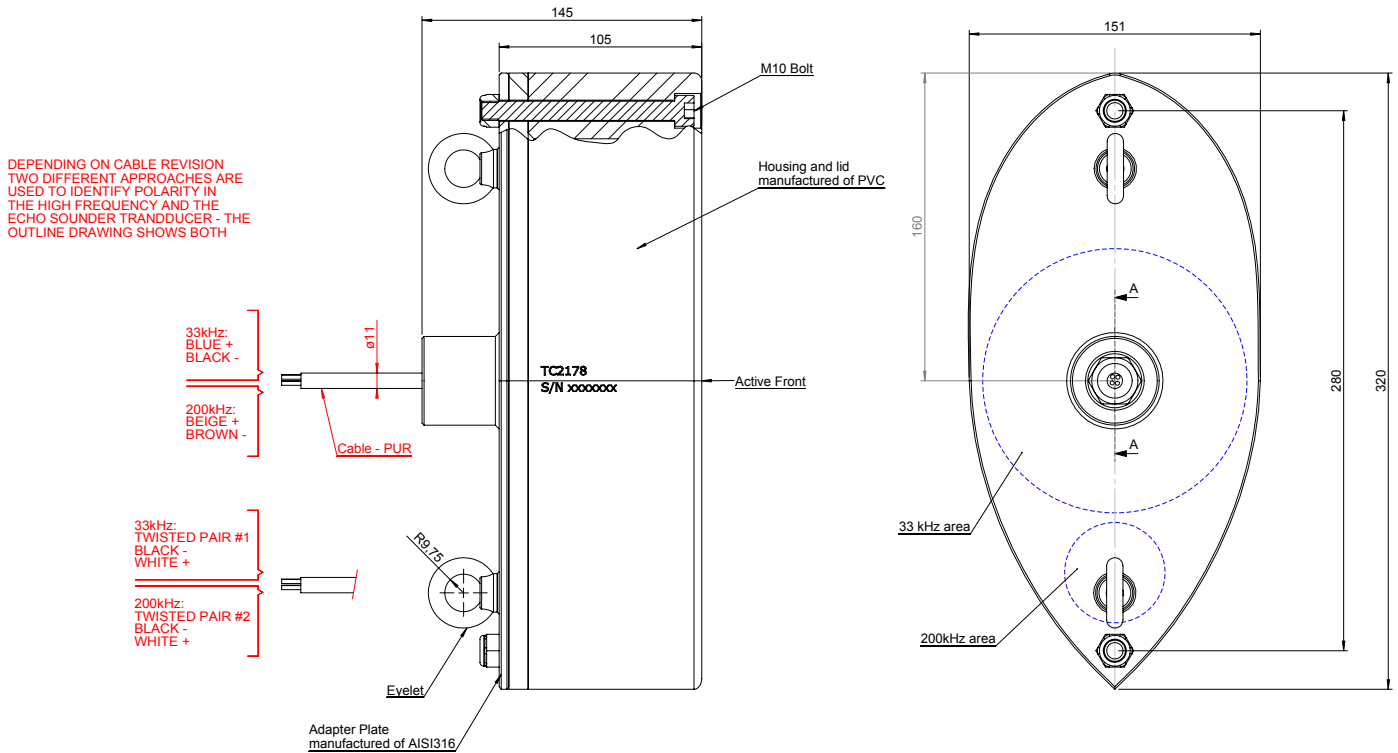

RESON reserves the right to change specifications without notice. © 2006 RESON A/S
For Acoustical Measurement Accuracy please refer to www.reson.com or contact sales.

RESON A/S
Denmark
Tel: +45 4738 0022
E-mail: reson@reson.com

RESON Inc.
USA
Tel: +1 805 964-6260
E-mail: sales@reson.com

RESON Offshore Ltd.
United Kingdom
Tel: +44 1224 709 900
E-mail: sales@reson.co.uk

RESON GmbH
Germany
Tel: +49 431 720 7180
E-mail: reson@reson-gmbh.de

RESONB.V.
The Netherlands
Tel: +31 (0) 10 245 1500
E-mail: info@reson.nl

RESON (Pte.) Ltd.
Singapore
Tel: +65 6725 9851
E-mail: sales@reson.com