



TC3021

- Depth rating 700m operating
- Extreme narrow beam width

Universal 2MHz transducer ideal for short range high precision sound velocity measurements.


TECHNICAL SPECIFICATIONS

Resonant Frequency:	2MHz
Transmitting Sensitivity:	184dB ±3dB at 2Mhz (re µPa/V at 1m)
Receiving Sensitivity:	-207dB ±3dB at 2Mhz (re V/µPa)
Impedance:	230ohm ±110hm at 2MHz
Phase:	0° ±30°at 2MHz
Beam shape	Conical
Beam width:	2,2°
Side lobe Suppression	Better than -12dB
Max input power:	5W (1% duty cycle)
Operating depth:	700m
Survival depth:	1000m
Operating temperature range:	+2°C to +35°C
Storage temperature range:	-30°C to +50°C
Cable: (Length and type)	1.5m, Coax cable RG 174/u
Housing:	PVC – black
Weight (air) incl. cable:	35g


Please note that this product requires a minimum quantity per order




Horizontal directivity pattern

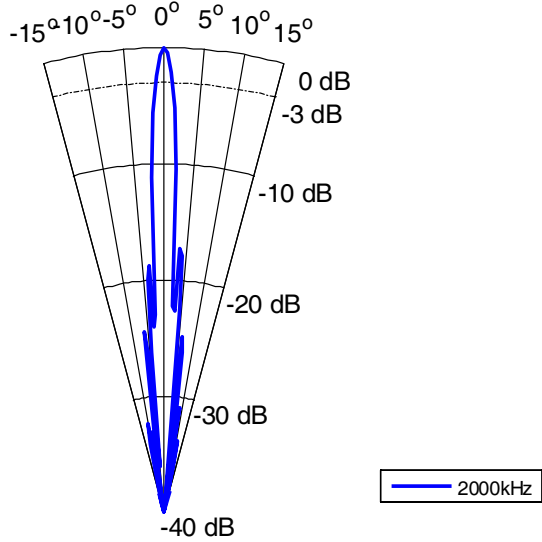


Receiving Sensitivity [dB re 1V/ μ Pa @ 1m]

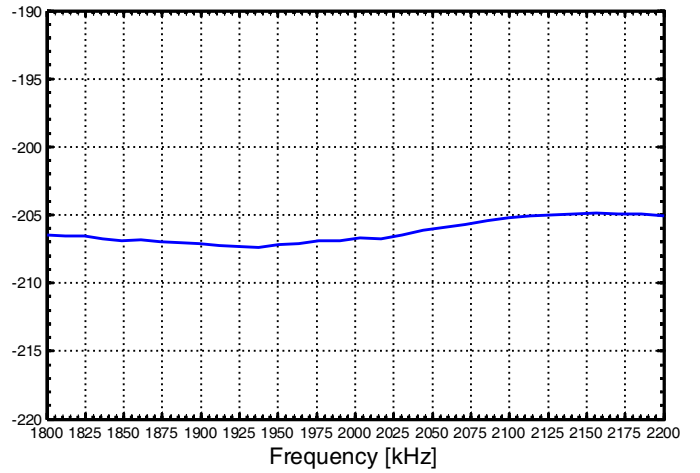


Transmitting Sensitivity [dB re 1 μ Pa/V @ 1m]

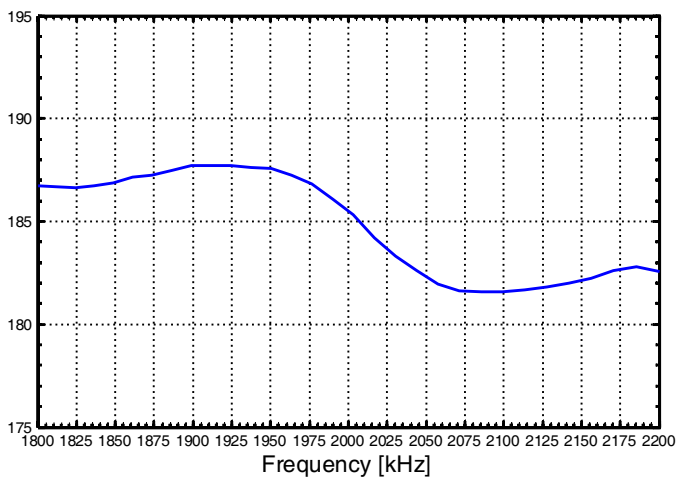

Impedance

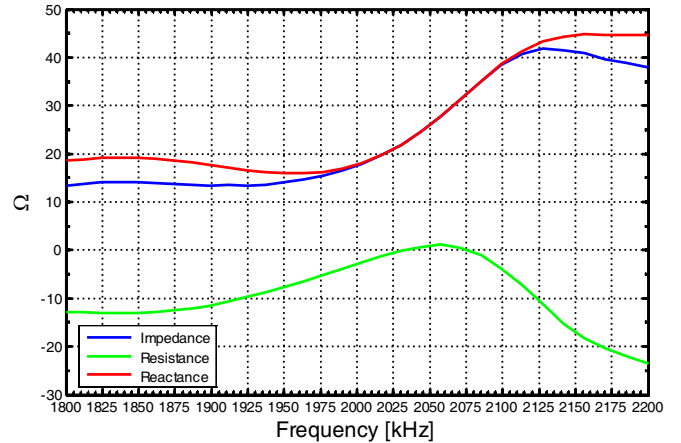

Outline Dimensions

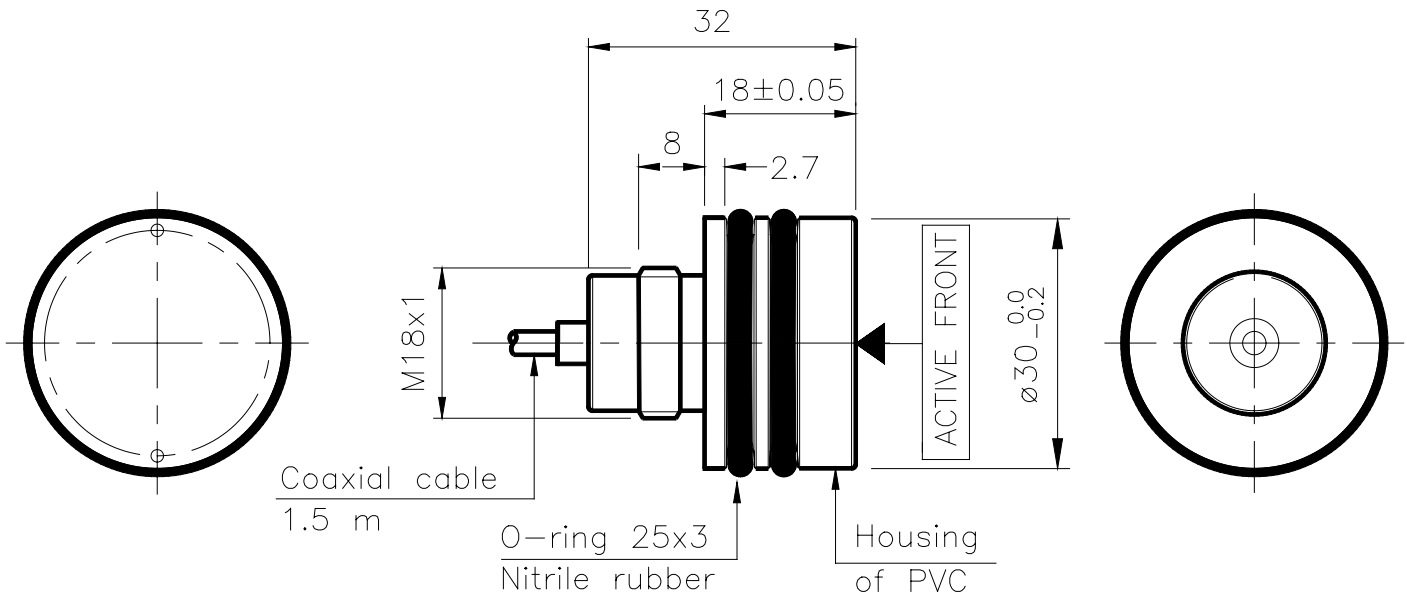

RESON reserves the right to change specifications without notice. © 2006 RESON A/S
For Acoustical Measurement Accuracy please refer to www.reson.com or contact sales.

RESON A/S
Denmark
Tel: +45 4738 0022
E-mail: reson@reson.dk

RESON GmbH
Germany
Tel: +49 431 720 7180
E-mail: reson@reson-gmbh.de

RESON Inc.
USA
Tel: +1 805 964-6260
E-mail: sales@reson.com

RESON B.V.
The Netherlands
Tel: +31 (0)10 245 1500
E-mail: info@reson.nl

RESON Offshore Ltd.
United Kingdom
Tel: +44 1224 709 900
E-mail: sales@reson.co.uk

RESON Mediterranean SRL
Italy
Tel: +39-051-572-643
E-mail: info@reson.it